

CARO[®]TEC & CARO[®]ROD

A perfect pairing for standard & low vacuum casting




Optimized cooling capacity
Low wear plunger tip concept
Complete solution from a single source


CARO®TEC

The CARO®TEC series has been developed for standard die casting and low vacuum. Different plunger tip designs are available depending on application.


- Selectable cooling capacity and stability
- Ideal material pairing and design
- Appropriate for low vacuum
- Only copper parts are in contact with shotsleeve
- Long lifetime less downtime

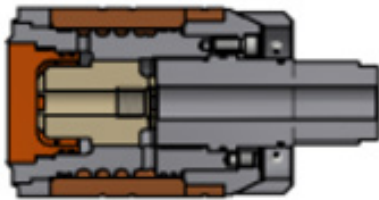

CARO®TEC - 2

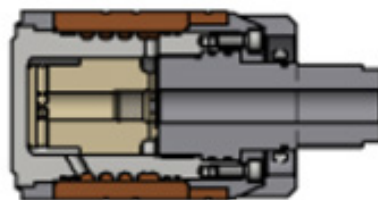

CARO®TEC - 3

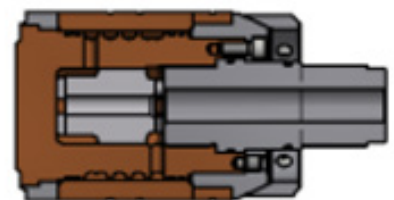

CARO®COOL

CARO®ROD

The plunger rod can optionally be equipped with integrated lubrication for the minimum lubrication devices.

- Optional with lubrication system for CARO®LUB
- Guide elements for override safety & alignment
- Optimized lubrication for improved casting quality



Compatible devices



Caro®Lub 2.1



Caro®Lub 3.1



Caro®Lub 4.0

For further information please contact:

Christoph Kornblum | Head of Die Casting

P +49 9129 4006 26 @ christoph.kornblum@wieland-caro.com